



# DROP-IN

## WRAPPED COLDWALL COLD PAN MODEL 9900SCA/SCN

Self-contained, wrapped coldwall drop-in refrigerated cold display pan with one piece stainless steel interior and top. Drain, and gate valve provided. R-404a refrigerant, "CFC free". Wrapped refrigeration construction with condensing unit, expansion valve, and thermostatic control. Cordset for 115V operation. Meets NSF Std. #7 for holding 41°F. product temperatures.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

### AVAILABLE MODELS:

- 9918SCA
- 9928SCA
- 9943SCA
- 9957SCA
- 9972SCA
- 9986SCA
- 9946SCN
- 9966SCN
- 9987SCN

### STANDARD FEATURES:

- Swivel base condensing unit allows for unlimited location of the single air intake/exhaust louver (model 9918SCA is not available with rotating compressor housing).
- New Randell exclusive easy mount system
- Self-contained, wrapped refrigeration system with thermostatic control, system utilizes "CFC free", R-404a refrigerant
- Meets 1998 NSF Std. #7 - holds 41°F product temperatures
- All stainless steel top and covered corner interior
- Drain and gate valve provided
- Foamed in place, "CFC free" urethane insulation
- One dual air movement louver provided
- 9' corset for 120V plug-in operation
- Self-contained, refrigerated unit for cold display without ice
- Custom sizes available
- Easy installation with sliding hood, louver and hold down brackets

**CABINET EXTERIOR:** Top and covered corner interior to be constructed of 18 gauge stainless steel. Exterior body to be corrosion resistant steel. Condensing unit mounted on corrosion resistant framework, suspended below unit body. (1) stainless steel louver panel provided for field installation in counter.

**UNIT INTERIOR:** Interior fitted with 1" drain at one end. Drain nipple supplied with gate valve. Insulated with CFC free, foamed in place polyurethane. Recessed, stainless steel ledge provided for supporting pans, adaptor bars included on SCA units.

**REFRIGERATION:** CFC free, R-404a refrigeration system to be wrapped refrigeration construction with thermostatic control for operator adjustability. Entire system mounted on corrosion resistant framework, suspended below unit body. 8' cordset (NEMA 5-15P) supplied for 115V operation.


**ORIGIN OF MANUFACTURE:** Designed and manufactured in the United States.

Self-contained, wrapped coldwall drop-in refrigerated cold display pan with one piece stainless steel interior and top. Models 9986SCA and 9966SCN shown.



### OPTIONS/ACCESSORIES:

- Adaptor bars
- Remote on/off switch

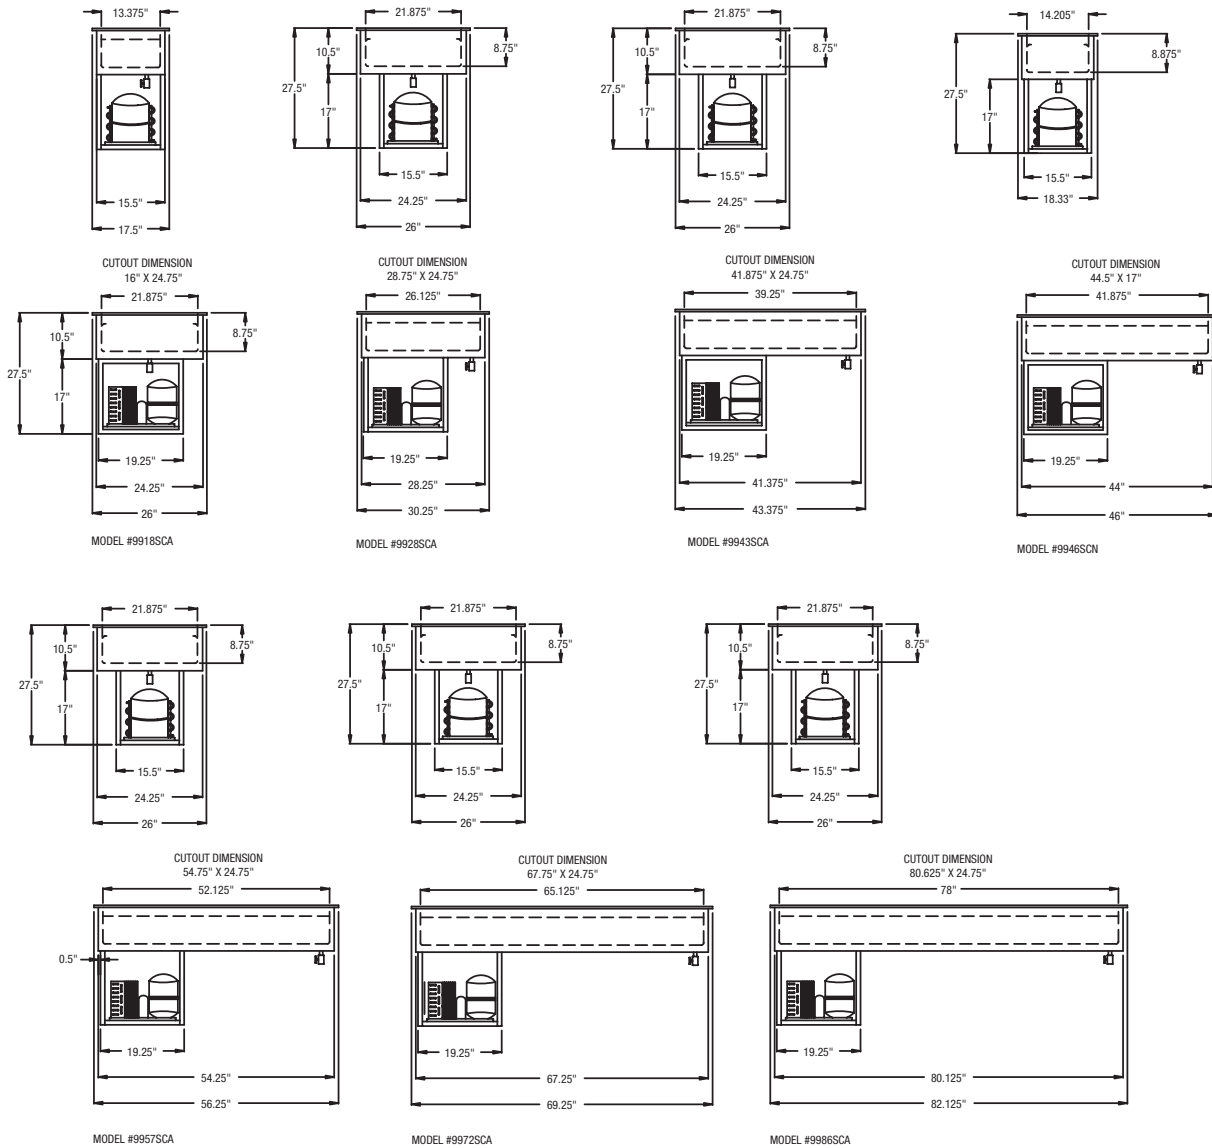

| Model   | 12"x20"<br>Pan Capacity | Q/A Dimension<br>Length | Width    | Cut Out Size<br>Length | Width   | HP  | Volt     | Amps | NEMA  | Ship Wt. |
|---------|-------------------------|-------------------------|----------|------------------------|---------|-----|----------|------|-------|----------|
| 9918SCA | 1                       | 17 1/2"                 | 26"      | 16"                    | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 110      |
| 9928SCA | 2                       | 30 1/4"                 | 26"      | 28 3/4"                | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 140      |
| 9943SCA | 3                       | 43 3/8"                 | 26"      | 41 7/8"                | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 175      |
| 9957SCA | 4                       | 56 1/4"                 | 26"      | 54 3/4"                | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 210      |
| 9972SCA | 5                       | 69 1/4"                 | 26"      | 67 3/4"                | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 245      |
| 9986SCA | 6                       | 82 1/8"                 | 26"      | 80 5/8"                | 24 3/4" | 1/4 | 115/60/1 | 5    | 5-15P | 280      |
| 9946SCN | 2                       | 46"                     | 18 5/16" | 44 1/2"                | 17"     | 1/4 | 115/60/1 | 5    | 5-15P | 140      |
| 9966SCN | 3                       | 66 3/4"                 | 18 5/16" | 65 7/16"               | 17"     | 1/4 | 115/60/1 | 5    | 5-15P | 175      |
| 9987SCN | 4                       | 87 1/2"                 | 18 5/16" | 86"                    | 17"     | 1/4 | 115/60/1 | 5    | 5-15P | 210      |