



# HANDLING & STORAGE EQUIPMENT

## COMBINATION PELLET AND PLATE HEATER

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION:

### AVAILABLE MODELS:

- ALC CPPH

### STANDARD FEATURES:

- Stainless steel is nickel-bearing, 200 series minimum, NSF recognized for corrosion resistance
- Two heated compartments, one for plates and one for pellets, which are independently controlled and have an automatic hi-temp shut-off
- Accommodates dishes and pellets ranging from 7" to 10-1/4"
- 208/220 VAC, 60 Hz, single phase, six foot grounded 20 amp power cord supplied
- (4) 5" non-marking poly swivel casters - 2 with brake
- NEMA 6-20P plug

**CONSTRUCTION:** Stainless steel is nickel-bearing, 200 series minimum. This material is NSF recognized for corrosion resistance. The outer unit is constructed of 18 gauge stainless steel. Inner walls are constructed of .063 high strength aluminum. All sides and lids of unit are insulated with fiberglass insulation.

**LIDS:** Unique hat channel design requires no gaskets.

**HEATING SYSTEM:** Thermostatically controlled, forced air heating system with 3200 watt element.

**SELF-LEVELING DISPENSER:** Individual, removable, self-adjusting and all stainless steel construction. Self-lubricating bearings ride over vertical guide rods. Available stacking height is 27-1/4".

**ORIGIN OF MANUFACTURE:** Designed and manufactured in the United States.

ALC PLH2 Model shown.






### OPTIONS/ACCESSORIES:

- 240VAC



Top View

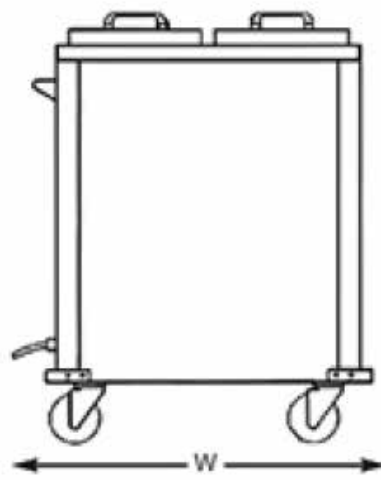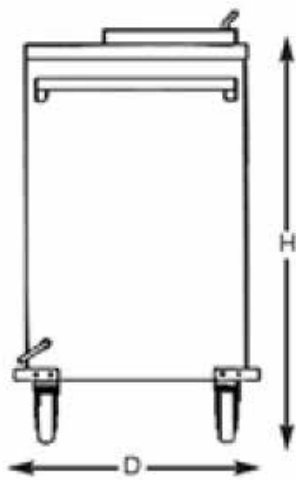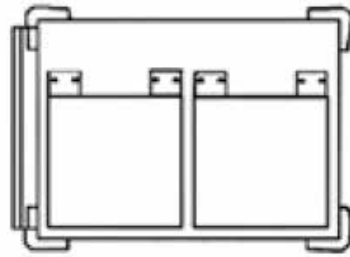

<b>Model No.</b>	ALC CPPH
<b>Width</b>	36"
<b>Depth</b>	24"
<b>Height</b>	42-3/4"
<b>Caster Type</b>	4 Swivel, 2 w/Brake
<b>Caster Diameter</b>	5"
<b>Watt</b>	3200
<b>Amp</b>	17.2
<b>Volt</b>	208/220, 60Hz
<b>Case Cu. Ft.</b>	32.7
<b>Ship Wt. (lbs)</b>	285