



HANDLING & STORAGE EQUIPMENT

HIGH VALUE TRAY CART

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION:

AVAILABLE MODELS:

- ALC HVTCA-20
- ALC HVTCA-24
- ALC HVTCSS-20
- ALC HVTCSS-24

STANDARD FEATURES:

- Dual, vertical push/pull handles are mounted on rear of cart
- Full perimeter bumper is attached to cart base assembly
- 5" ledge spacing
- Non-insulated, non-heated cart
- Cart has 6" diameter cushion casters with zerk fittings (2 swivel casters - 2 with brake)
- Customization available

CONSTRUCTION: Stainless steel is nickel-bearing, 200 series minimum. This material is NSF recognized for corrosion resistance. Body available in .063 aluminum or 18 gauge premium stainless steel. Base is made from .125 aluminum or 14 gauge stainless steel.


DOORS: Single door design with full length stainless steel hinge and heavy duty stainless steel gravity latch. Doors open a full 270 degrees and lay neatly against side of cart. Door is made of .090 aluminum or 16 gauge stainless steel.

TRAY SLIDES: Contour seamless tray slides are easily removable for better cleaning. Available for 13-1/2" x 23" or 14" x 18" trays. Tray size must be specified with order. Ledges are 1-3/16" wide. 5" ledge spacing.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

ALC HVTC Model shown.



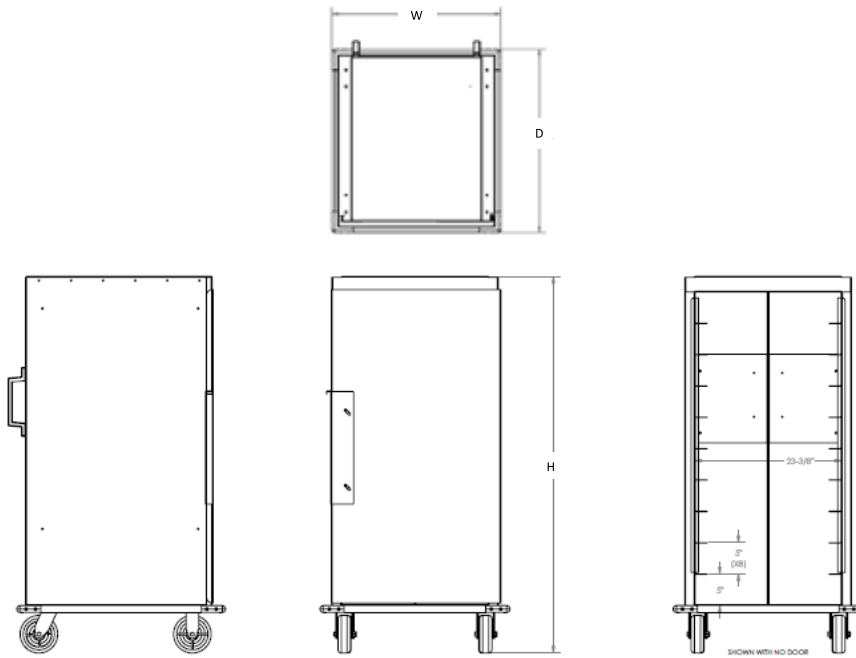

Model No.	ALC HVTC-A-20	ALC HVTC-A-24
Height	60-1/8"	70-1/8"
13-1/2" x 23"		
Width	30-3/8"	30-3/8"
Depth	33-3/8"	33-3/8"
14" x 18"		
Width	24-3/4"	24-3/4"
Depth	32-3/4"	32-3/4"
Caster Type	4 Swivel, 2 w/Brake	4 Swivel, 2 w/Brake
Caster Diameter	6"	6"
Construction	Aluminum	Aluminum
Trays	20	24
Ship Wt. (lbs)	140	155

Model No.	ALC HVTCSS-20	ALC HVTCSS-24
Height	60-1/8"	70-1/8"
13-1/2" x 23"		
Width	30-3/8"	30-3/8"
Depth	33-3/8"	33-3/8"
14" x 18"		
Width	24-3/4"	24-3/4"
Depth	32-3/4"	32-3/4"
Caster Type	4 Swivel, 2 w/Brake	4 Swivel, 2 w/Brake
Caster Diameter	6"	6"
Construction	Stainless Steel	Stainless Steel
Trays	20	24
Ship Wt. (lbs)	220	250