



SERVING LINES, FIBERGLASS

FROST TOP MODEL FTA

Randell's FTA Self-Contained Mechanically Cooled Frost Top Units designed for virtually any cold food serving application, the FTA series is enclosed in brilliant one-piece fiberglass body and stainless steel top.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

AVAILABLE MODELS:

14 GAUGE TOP:

- 14GFG FTA-2
- 14GFG FTA-3
- 14GFG FTA-4
- 14GFG FTA-5
- 14GFG FTA-6
- 14GFG FTA-4S
- 14GFG FTA-5S
- 14GFG FTA-6S

16 GAUGE TOP:

- RANFG FTA-2
- RANFG FTA-3
- RANFG FTA-4
- RANFG FTA-5
- RANFG FTA-6
- RANFG FTA-4S
- RANFG FTA-5S
- RANFG FTA-6S

AVAILABLE FIBERGLASS COLORS:

- Pitch Black
- Dark-Bark Brown
- Cabernet Wine
- British Racing Green
- Tin Man Gray
- True Blue
- Light Sky Blue
- Candy Apple Red
- Tiger Lilly Orange
- Canary Yellow
- White

STANDARD FEATURES:

- Easy access to service the condensing coil through the hinged louver
- Concealed locking mechanism with easy to use spring-activated catch
- Hinged access to drain gate valve
- Easy access to thermostat through the hinged louver panel
- Single-Sided louver designed to efficiently cool system without need for auxiliary louvers on the opposite side

ADDITIONAL AVAILABLE CONFIGURATIONS:

- FTA "S" Series: Same basic construction of standard enclosed base series with an optional open shelf storage compartment.

CABINET CONSTRUCTION: One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers.

TOP CONSTRUCTION: Exterior top is standard in reinforced 14 or 16 gauge 300 series stainless steel with #4 finish.

FROST TOP CONSTRUCTION: The Frost Tops are constructed of die formed stainless steel and are provided with a perimeter trough and drain. Mechanical (compressor) housing with louvered access door.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.



Serving Lines, Fiberglass Frost Top. Model 14GFG FTA-4S shown with optional kick plate.




OPTIONS/ACCESSORIES:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Kick Plate
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System



Drawings are to be viewed in the same order as the chart

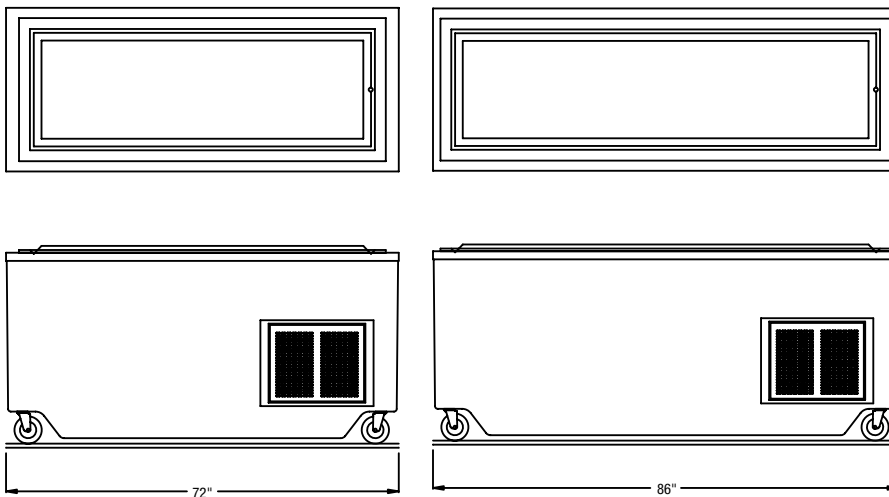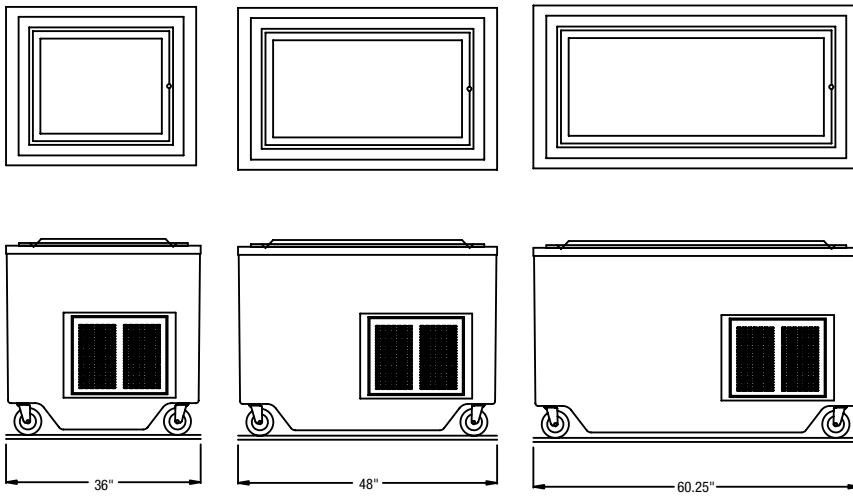

9' CORD & PLUG EXTENDING FROM BOTTOM OF UNIT
 Designed to maintain frosty-cold appearance.



LEGEND FOR RANFG FTA
 AFF. = ABOVE FIXED FLOOR
 HP COMPRESSOR JUNCTION BOX 14" AFF. 115V/60Hz/1PH 9' CORD NEMA #5-15P



FTA DRAWINGS SHOWN, FTA-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS

COMMON DATA FOR FTA SERIES (INCLUDES THE STANDARD FTA SERIES AND THE "S" STORAGE BASE SERIES)									
MODEL	L (A)	Top Depth	Work Height	Size of Frosted Surface	H.P.	Volts	NEMA	Amps	Ship Wt.
FTA-2	36"	30"	35"	23" x 18"	1/4	115V	5-5P	5	250
FTA-3	48"	30"	35"	35" x 18"	1/4	115V	5-5P	5	300
FTA-4(S)	60.25"	30"	35"	47" x 18"	1/4	115V	5-5P	5	350
FTA-5(S)	72"	30"	35"	59" x 18"	1/4	115V	5-5P	5	400
FTA-6(S)	86"	30"	35"	71" x 18"	1/4	115V	5-5P	5	450

*Amp loads may change when adding incandescent light options.

Storage Shelf Information for FTA "S" Series				
36" & 48" not available with storage shelf (too small)				
MODEL	L (A)	W (B)	H (C)	Ship Wt.
FTA-4S	60.25"	25.5"	14.5"	375
FTA-5S	72"	37.5"	14.5"	425
FTA-6S	86"	51.5"	14.5"	475