



SERVING LINES, STAINLESS STEEL

REFRIGERATED COLD PAN MODEL SCA

Portable, stainless steel self-contained cold pan serving station. 1" drain provided. Available with enclosed base or open storage. Foamed in place (CFC free) insulation. Interchangeable stainless steel, or laminate body panels, snap together locking device designed to work with all other RanServe equipment. (4) swivel casters provided. R-404a wrapped refrigeration system is "CFC free", and meets NSF standard #7.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

AVAILABLE MODELS:

- | | |
|-------------------------------------|-------------------------------------|
| 14 GAUGE TOP: | 16 GAUGE TOP: |
| <input type="checkbox"/> 14G SCA-2 | <input type="checkbox"/> RAN SCA-2 |
| <input type="checkbox"/> 14G SCA-3 | <input type="checkbox"/> RAN SCA-3 |
| <input type="checkbox"/> 14G SCA-4 | <input type="checkbox"/> RAN SCA-4 |
| <input type="checkbox"/> 14G SCA-5 | <input type="checkbox"/> RAN SCA-5 |
| <input type="checkbox"/> 14G SCA-6 | <input type="checkbox"/> RAN SCA-6 |
| <input type="checkbox"/> 14G SCA-2S | <input type="checkbox"/> RAN SCA-2S |
| <input type="checkbox"/> 14G SCA-3S | <input type="checkbox"/> RAN SCA-3S |
| <input type="checkbox"/> 14G SCA-4S | <input type="checkbox"/> RAN SCA-4S |
| <input type="checkbox"/> 14G SCA-5S | <input type="checkbox"/> RAN SCA-5S |
| <input type="checkbox"/> 14G SCA-6S | <input type="checkbox"/> RAN SCA-6S |

STANDARD FEATURES:

- Stainless steel self-contained cold pan with expansion valve, temperature control and one piece interior
- HFC-404a refrigerant, "CFC free"
- Foamed in place (CFC free) high density polyurethane insulation. Interchangeable body panels.
- Concealed locking mechanism with easy to use spring-activated catch
- 1" drain, drain nipple and ball valve
- Swivel casters - (2) locking
- Meets NSF standard #7

ADDITIONAL AVAILABLE CONFIGURATIONS:

- **SCA "S" Series:** (Cafeteria style with open base) Same spec as SCA series only "S" series units to have partial stainless steel panel on one side with undershelf. Undershelf to be 22 gauge stainless steel with integrally welded steel under-bracing. Self-contained display pan to have ball valve, accessible thru storage area.

UNIT TOP: Top to be one piece of die-formed 14 or 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Unit fitted with 9 1/2" deep self-contained display cold pan. Interior of pan to be one piece, continuously welded construction of 18 gauge stainless steel. Interior fitted with 1" drain at one end. Drain nipple supplied with ball valve and lever extension to cabinet exterior on enclosed base units - drain lines run to accessible area.

UNIT BODY: Body frame to be all welded construction of steel with exposed corners to be 1 1/2" stainless steel. All corners welded and polished. Body ends and panels to be plastic laminate with galvanized steel backing (specify laminate color). Body ends and panels to be removable to allow the changing of colors. Cold pan wrapped with refrigeration lines and insulated with high density (CFC free) polyurethane, foamed in place. Unit to be equipped with 4 swivel casters, (2) locking, that are recessed inside of toe area.

REFRIGERATION: CFC free, R-404a refrigeration system to be wrapped refrigeration construction. Expansion valve, and thermostatic control for operator adjustability mounted in compressor housing. 8' cordset (NEMA 5-15P) supplied for 115V operation.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

Serving Lines, Refrigerated Cold Pan. Model SCA-3 Enclosed Base shown:




Model SCA-3S Storage Base shown:



OPTIONS/ACCESSORIES:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Laminates
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System

Drawings are to be viewed in the same order as the chart

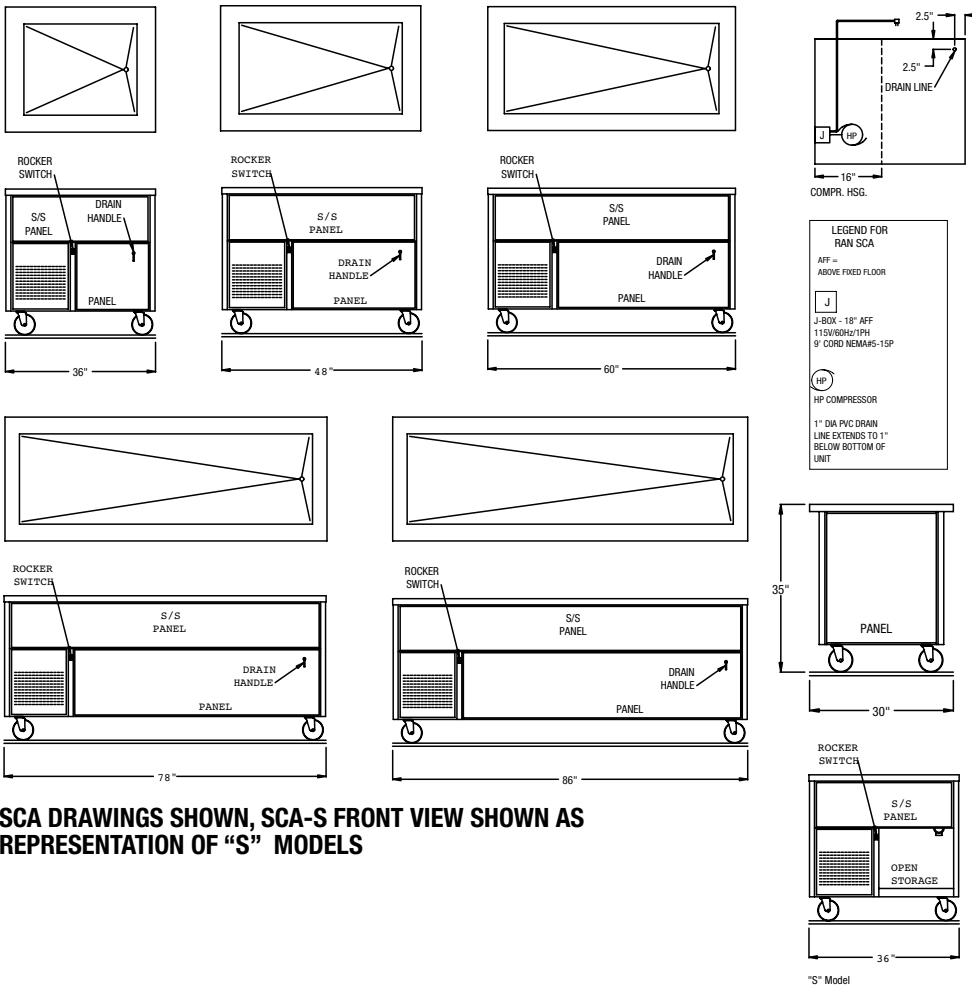

SCA DRAWINGS SHOWN, SCA-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS

ENCLOSED BASE MODELS	L	D	H	12"X20" Pan Capacity	Coldpan Interior Dimensions	HP	Volts	Amps	NEMA	Ship Wt.
SCA-2	36"	30"	35"	2	26 1/4" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	250
SCA-3	48"	30"	35"	3	39 1/8" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	300
SCA-4	60"	30"	35"	4	52 1/16" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	350
SCA-5	72"	30"	35"	5	64 15/16" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	400
SCA-6	86"	30"	35"	6	77 7/8" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	450
OPEN BASE										
SCA-2S	36"	30"	35"	2	28 1/8" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	275
SCA-3S	48"	30"	35"	3	39 1/8" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	325
SCA-4S	60"	30"	35"	4	52 1/16" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	375
SCA-5S	72"	30"	35"	5	64 15/16" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	425
SCA-6S	86"	30"	35"	6	77 7/8" x 21" x 8 3/4"	1/4	115/60/1	5	5-15P	475