



DROP-IN

FROST TOP MODEL RFT

Drop-in self-contained, mechanically cooled, frost top unit with one piece stainless steel top with drain. Environmental safe R-290 refrigeration system is SNAP compliant (0) ozone depletion (ODP) and (3) global warming potential (GWP). Includes precise temperature electronic control and cordset for 115v operation. Top is constructed using wrapped refrigeration with foamed in place urethane insulation.

SHORT FORM SPEC: Randell RFT series drop-in frost top cold display with 1-piece 16 gauge stainless steel top with 1" drain, insulated with CFC foamed in place polyurethane insulation. Electronically controlled R290 refrigeration system is suspended below body on swivel base corrosion resistant framework and provided with dual air movement louvered panel. Recessed top is sized to accommodate half and/or full sized sheet pans.

AVAILABLE MODELS:

- RFT-2
- RFT-3
- RFT-4
- RFT-5
- RFT-6

STANDARD FEATURES:

- Swivel base condensing unit allows for front or side location of the single air intake/exhaust louver
- Exclusive easy mount system
- Self-contained, wrapped refrigeration system with electronic control, system utilizes "CFC free", R-290 refrigerant
- All stainless steel top and coved corner interior
- 1" NPS brass drain provided
- Foamed in place, "CFC free" urethane insulation
- One dual air movement louver provided
- 9' cordset for 120V plug-in operation
- Self-contained, refrigerated unit for cold display without ice
- SNAP compliant (0) ozone depletion (ODP) and (3) global warming potential (GWP)
- Easy installation with sliding duct, louver and hold down brackets

CABINET EXTERIOR: Top and coved corner interior to be constructed of 16 gauge stainless steel. Exterior body to be corrosion resistant steel. Condensing unit mounted on corrosion resistant framework, suspended below unit body. (1) stainless steel louver panel provided for field installation in counter.

UNIT INTERIOR: Interior fitted with 1" drain at one end. Insulated with CFC free, foamed in place polyurethane. Recessed top accommodates half and/or full sized sheet pans.

REFRIGERATION: SNAP compliant (0) ozone depletion (ODP) and (3) global warming potential (GWP), R-290 refrigeration system to be wrapped refrigeration construction. Condensing unit, and electronic control for operator adjust-ability mounted on corrosion resistant framework, suspended below the unit body. 8' cordset (NEMA 5-15P) supplied for 115V operation.

ORIGIN OF MANUFACTURE:
Designed and manufactured in the United States.















PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



Model RFT-6 shown

OPTIONS/ACCESSORIES:

- Remote on/off switch
- Custom size

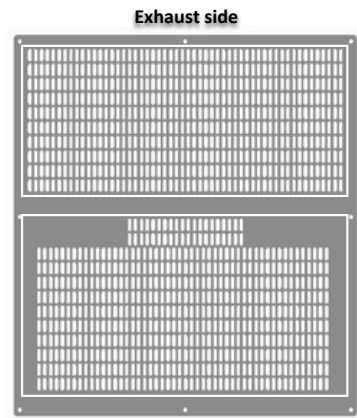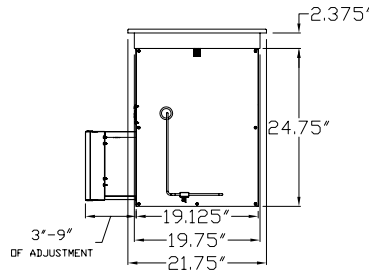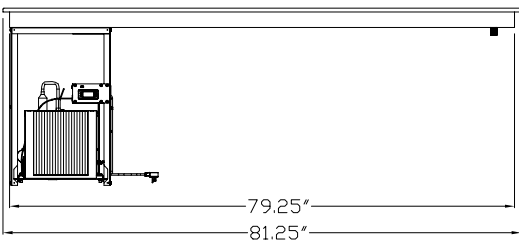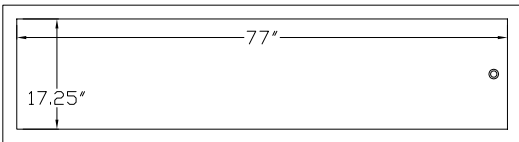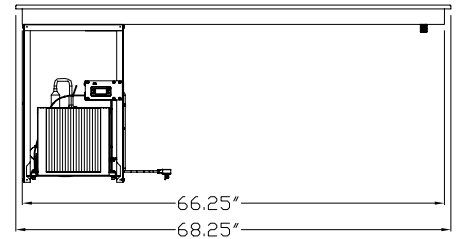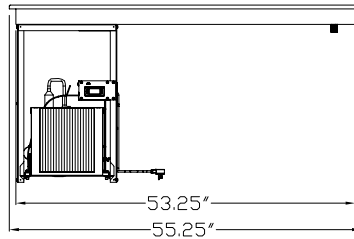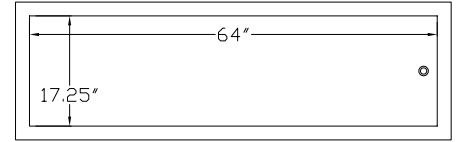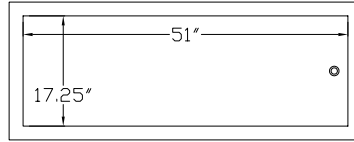

Exhaust side

Air Intake side

Exhaust

Total Exhaust Area = 88.7 in²

Exhaust Area slots : 10 x 54 = 540 slots

Perforation size : 0.75 in x .22 in (19 mm x 5.5mm)

Air Intake

Total Air Intake Area = 88.7 in²

Air Intake Area : 10 x 50 & 2 x 20 = 540 slots

Perforation Size : 0.75 in x .22 in (19 mm x 5.6 mm)

Model	Length	Width	Pan Capacity 18" X 13"	Cutout Dim		HP	Volts	Amps	NEMA	Ship Wt (Lbs)
				L	W					
RFT-2	29.25"	21.6"	2	27.7"	20.3"	1/4	115/60/1	3.5	5-15P	140
RFT-3	42.25"	21.6"	3	40.7"	20.3"	1/4	115/60/1	3.5	5-15P	175
RFT-4	55.25"	21.6"	4	53.7"	20.3"	1/4	115/60/1	3.5	5-15P	210
RFT-5	68.25"	21.6"	5	66.7"	20.3"	1/4	115/60/1	3.5	5-15P	245
RFT-6	81.25"	21.6"	6	79.7"	20.3"	1/4	115/60/1	3.5	5-15P	280