



SERVING LINES, FIBERGLASS

ELECTRIC HEATED WELL MODEL HTD-B

Randell's HTD Series Electric Heated Well Units designed for virtually any hot food serving application, the HTD series is enclosed in a brilliant one-piece fiberglass body and stainless steel top.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

AVAILABLE MODELS:

14 GAUGE TOP:

- 14GFG HTD-3B
- 14GFG HTD-4B
- 14GFG HTD-5B
- 14G FGHTD-6B

16 GAUGE TOP:

- RANFG HTD-3B
- RANFG HTD-4B
- RANFG HTD-5B
- RAN FGHTD-6B

AVAILABLE FIBERGLASS COLORS:

- Pitch Black
- Dark-Bark Brown
- Cabernet Wine
- British Racing Green
- Tin Man Gray
- True Blue
- Light Sky Blue
- Candy Apple Red
- Tiger Lilly Orange
- Canary Yellow
- White

STANDARD FEATURES:

- Easy access to drain and controls
- Easy access to service electrical components
- Concealed locking mechanism with easy to use spring-activated catch

ADDITIONAL AVAILABLE CONFIGURATIONS:

- HTD Series: Standard enclosed base series.
- HTD "S" Series: Same basic construction of standard enclosed base series with an optional open shelf storage compartment.

CABINET CONSTRUCTION: One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers. Heated storage compartment.

TOP CONSTRUCTION: Exterior top is standard in reinforced 14 or 16 gauge 300 series stainless steel with #4 finish.

HOT WELL CONSTRUCTION: The hot wells are constructed of die stamped and annealed stainless steel and are provided with individual drains manifolded to a common gate valve. The gate valve is accessed through an enclosed housing with louvered access door. Two types of fittings are provided to offer flexibility in type of drain hose the operator wishes to attach (hose not included). Only available in single phase.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.



Serving Lines, Fiberglass Electric Heated Well. Model 14GFG HTD-4S shown with optional kick plate.



OPTIONS/ACCESSORIES:


- Canopy
- Overshelves
- Trayslides
- Corian top
- Kick Plate
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System

Drawings are to be viewed in the same order as the chart

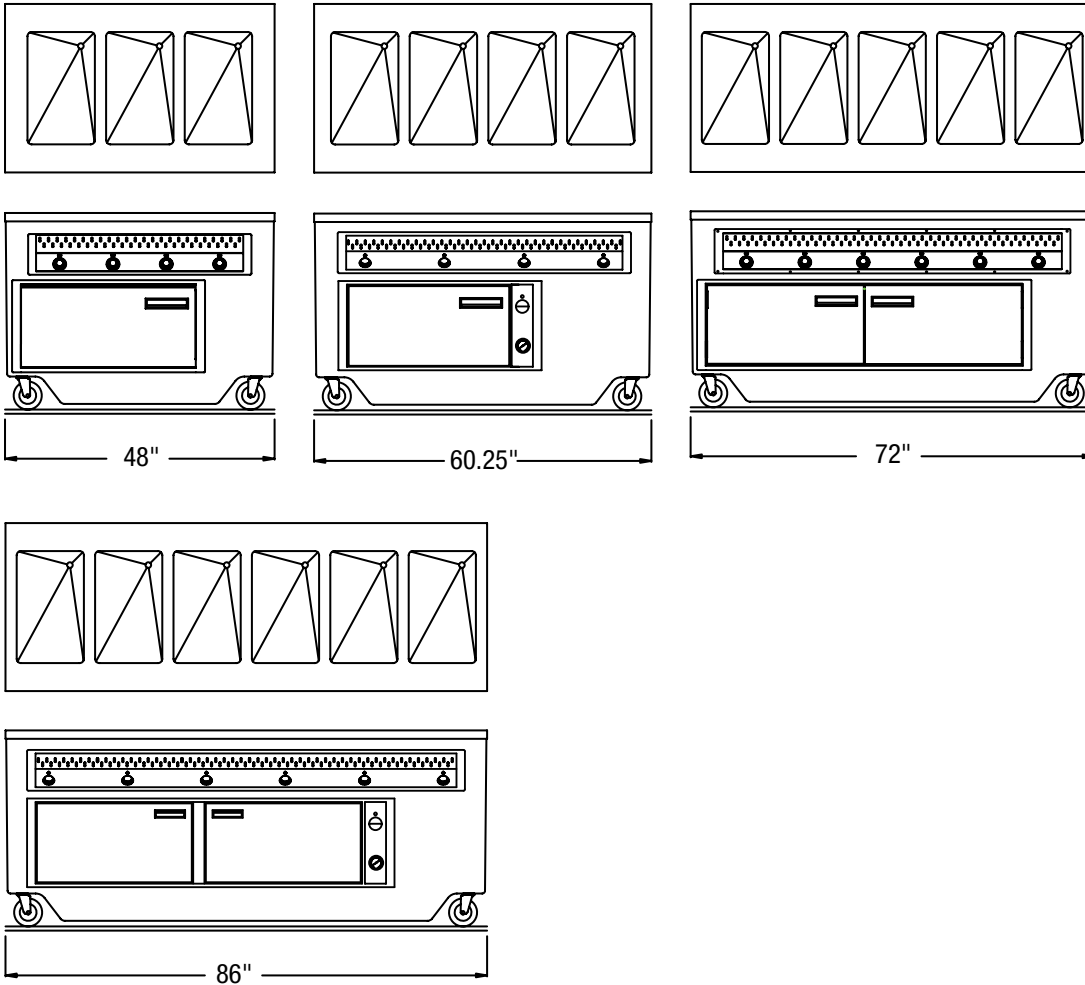

LEGEND FOR
RANFG HTD

AFF =
ABOVE FIXED FLOOR
J-BOX = 14" AFF
1/2" DIA COPPER
DRAIN LINE EXTENDS
TO LOUVER



MODEL	L	D	H	No. of Wells (12x20) and/or pans	208V Operation			240V Operation			Ship Wt.
					KW	Amps*	NEMA*	KW	Amps*	NEMA*	
"B" Heated Storage Base											
HTD-3B	48"	30"	35"	Top; (3) Wells Base; (4) 12x20 or (3) 18x26	4.125	19.8	6-30P	4.4	18.3	6-30P	350
HTD-4B	60.25"	30"	35"	Top; (4) Wells Base; (4) 12x20 or (3) 18x26	5.225	25.1	6-50P	5.5	22.9	6-50P	400
HTD-5B	72"	30"	35"	Top; (5) Wells Base; (8) 12x20 or (6) 18x26	6.325	30.4	6-50P	6.6	27.5	6-50P	450
HTD-6B	86"	30"	35"	Top; (6) Wells Base; (8) 12x20 or (6) 18x26	7.425	35.7	6-50P	7.7	32.1	6-50P	500

*Amp loads for base unit with light option-adding any Heat lamps or incandescent light options will change total load and/or number of electrical cords/con-
nections (consult factory for clarification).