



SERVING LINES, STAINLESS STEEL

FROST TOP MODEL FTA

Portable, stainless steel self-contained frost top serving station. Available with enclosed base or open storage. Foamed in place (CFC free) insulation. Interchangeable stainless steel, or laminate body panels, snap together locking device designed to work with all other RanServe equipment. (4) swivel casters provided. R-404a refrigerant, "CFC free".

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

AVAILABLE MODELS:

- | | |
|-------------------------------------|-------------------------------------|
| 14 GAUGE TOP: | 16 GAUGE TOP: |
| <input type="checkbox"/> 14G FTA-2 | <input type="checkbox"/> RAN FTA-2 |
| <input type="checkbox"/> 14G FTA-3 | <input type="checkbox"/> RAN FTA-3 |
| <input type="checkbox"/> 14G FTA-4 | <input type="checkbox"/> RAN FTA-4 |
| <input type="checkbox"/> 14G FTA-5 | <input type="checkbox"/> RAN FTA-5 |
| <input type="checkbox"/> 14G FTA-6 | <input type="checkbox"/> RAN FTA-6 |
| <input type="checkbox"/> 14G FTA-2S | <input type="checkbox"/> RAN FTA-2S |
| <input type="checkbox"/> 14G FTA-3S | <input type="checkbox"/> RAN FTA-3S |
| <input type="checkbox"/> 14G FTA-4S | <input type="checkbox"/> RAN FTA-4S |
| <input type="checkbox"/> 14G FTA-5S | <input type="checkbox"/> RAN FTA-5S |
| <input type="checkbox"/> 14G FTA-6S | <input type="checkbox"/> RAN FTA-6S |

STANDARD FEATURES:

- Stainless steel self-contained frost top with expansion valve and temperature control
- HFC-404a refrigerant, "CFC free"
- Foamed in place (CFC free) high density polyurethane insulation
- Interchangeable body panels
- Concealed locking mechanism with easy to use spring-activated catch
- Swivel casters - (2) locking

ADDITIONAL AVAILABLE CONFIGURATIONS:

- **FTA "S" Series:** (Cafeteria style with open base) Same spec as FTA series only "S" series units to have stainless steel intermediate, and undershelf. Shelves to be 22 gauge stainless steel with integrally welded tubular steel under-bracing.

UNIT TOP: Top to be one piece of die-formed 14 or 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Unit fitted with self-contained frost top. Frost top to be 1 piece 18-gauge stainless steel, with perimeter trough. Frost surface is 7" smaller than overall unit dimension. Unit top is elevated above counter surface.

UNIT BODY: Body frame to be all welded construction of steel with exposed corners to be 1 1/2" stainless steel. All corners welded and polished. Body ends and panels to be plastic laminate with galvanized steel backing (specify laminate color). Body ends and panels to be removable to allow the changing of colors. Frost top features cold wall construction with refrigeration lines insulated with high-density, (CFC free) polyurethane insulation, and 14 gauge galvanized under body. Unit to be equipped with 4 swivel casters, (2) locking, that are recessed inside of toe area.

REFRIGERATION: CFC free, R-404a refrigeration system to be wrapped refrigeration construction. Condensing unit, expansion valve, and thermostatic control for operator adjustability mounted in compressor housing. 8' cordset (NEMA 5-15P) supplied for 115V operation.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

Serving Lines, Stainless Steel Frost Top. Model FTA-3 Enclosed Base shown:





Model FTA-3S Open Base shown:



OPTIONS/ACCESSORIES:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Laminates
- Graphics
- Sneeze Guards
- Elementary School Height
- Electrical Distribution System

Drawings are to be viewed in the same order as the chart


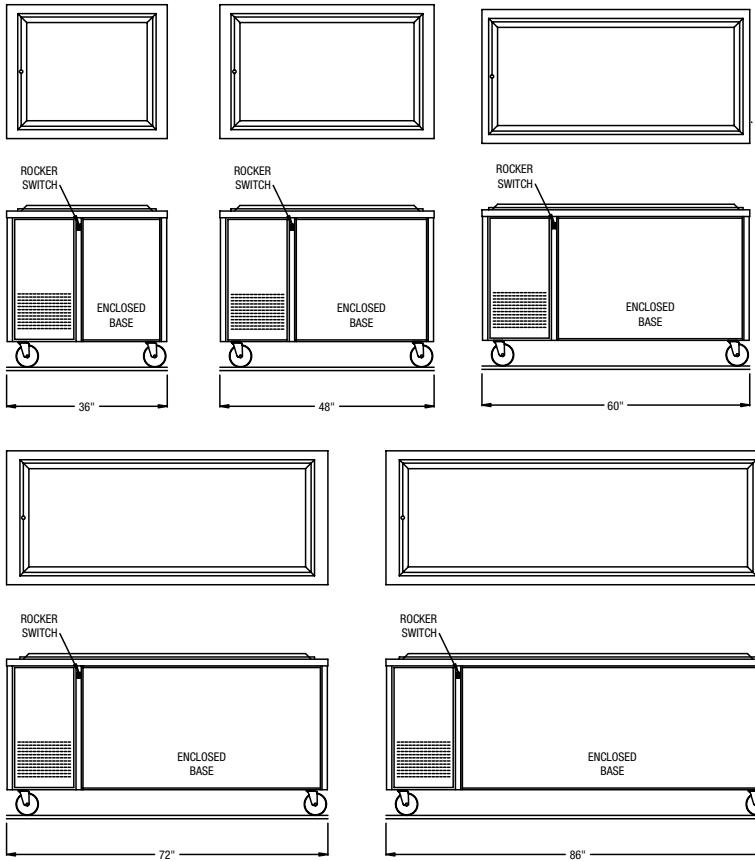


Designed to maintain frosty-cold appearance.

LEGEND FOR MODEL # RAN FTA
 AFF. = ABOVE FIXED FLOOR

HP HP COMPRESSOR
 JUNCTION BOX 6" AFF.
 115V/60Hz/1PH
 9' CORD NEMA #5-15P

1/2" DIA COPPER DRAIN
 LINE EXTENDS TO 1"
 BELOW BOTTOM OF UNIT



"S" Model

FTA DRAWINGS SHOWN, FTA-S FRONT VIEW SHOWN AS REPRESENTATION OF "S" MODELS

ENCLOSED BASE MODELS	L	D	H	H.P	Volts	Amps	NEMA	Ship Wt.
FTA-2	36"	30"	35"	1/4	115/60/1	5	5-15P	190
FTA-3	48"	30"	35"	1/4	115/60/1	5	5-15P	225
FTA-4	60"	30"	35"	1/4	115/60/1	5	5-15P	265
FTA-5	72"	30"	35"	1/4	115/60/1	5	5-15P	310
FTA-6	86"	30"	35"	1/4	115/60/1	5	5-15P	355
OPEN BASE								
FTA-2S	36"	30"	35"	1/4	115/60/1	5	5-15P	190
FTA-3S	48"	30"	35"	1/4	115/60/1	5	5-15P	225
FTA-4S	60"	30"	35"	1/4	115/60/1	5	5-15P	265
FTA-5S	72"	30"	35"	1/4	115/60/1	5	5-15P	310
FTA-6S	86"	30"	35"	1/4	115/60/1	5	5-15P	355

Note: Frost area is 7" less than overall dimension.