



# DROP-IN

## HOT FOOD WELL MODEL 9570

Stainless steel, drop-in, electrically heated hot food well unit with open water bath tank, thermostatically controlled. Separate control panel for field installation, prewired.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

### AVAILABLE MODELS:

- |                                 |                                    |
|---------------------------------|------------------------------------|
| <input type="checkbox"/> 9570-2 | <input type="checkbox"/> 9570-2AWF |
| <input type="checkbox"/> 9570-3 | <input type="checkbox"/> 9570-3AWF |
| <input type="checkbox"/> 9570-4 | <input type="checkbox"/> 9570-4AWF |
| <input type="checkbox"/> 9570-5 | <input type="checkbox"/> 9570-5AWF |
| <input type="checkbox"/> 9570-6 | <input type="checkbox"/> 9570-6AWF |

### STANDARD FEATURES:

- Open tank Baine Marie style for wet operation
- True thermostatic control for precise food temperatures
- Drain and gate valve
- Approved for installation in either stainless or laminate counter work
- Units listed under NSF standard 4
- UL approved

**UNIT TOP:** Top and water bath tank to be one piece, 16 gauge stainless steel.

**UNIT BODY:** Unit fitted with electric heating element(s) mounted beneath tank, insulated and shielded. Unit prewired to controls, mounted on separate stainless steel panel. 1" stainless steel drain nipple and gate valve provided. Fully insulated exterior body of corrosion resistant steel.

**CONTROLS:** Thermostatic control(s) prewired to junction box mounted on separate stainless steel panel for field installation in counter front. Connections to heating elements to be located outside of heated zone to avoid wiring deterioration. 208 or 240V operation.


**ORIGIN OF MANUFACTURE:** Designed and manufactured in the United States.

9570 Hot Food Well, Model 9570-2 shown.



### OPTIONS/ACCESSORIES:

- Adaptor bars
- Extended thermostatic lead

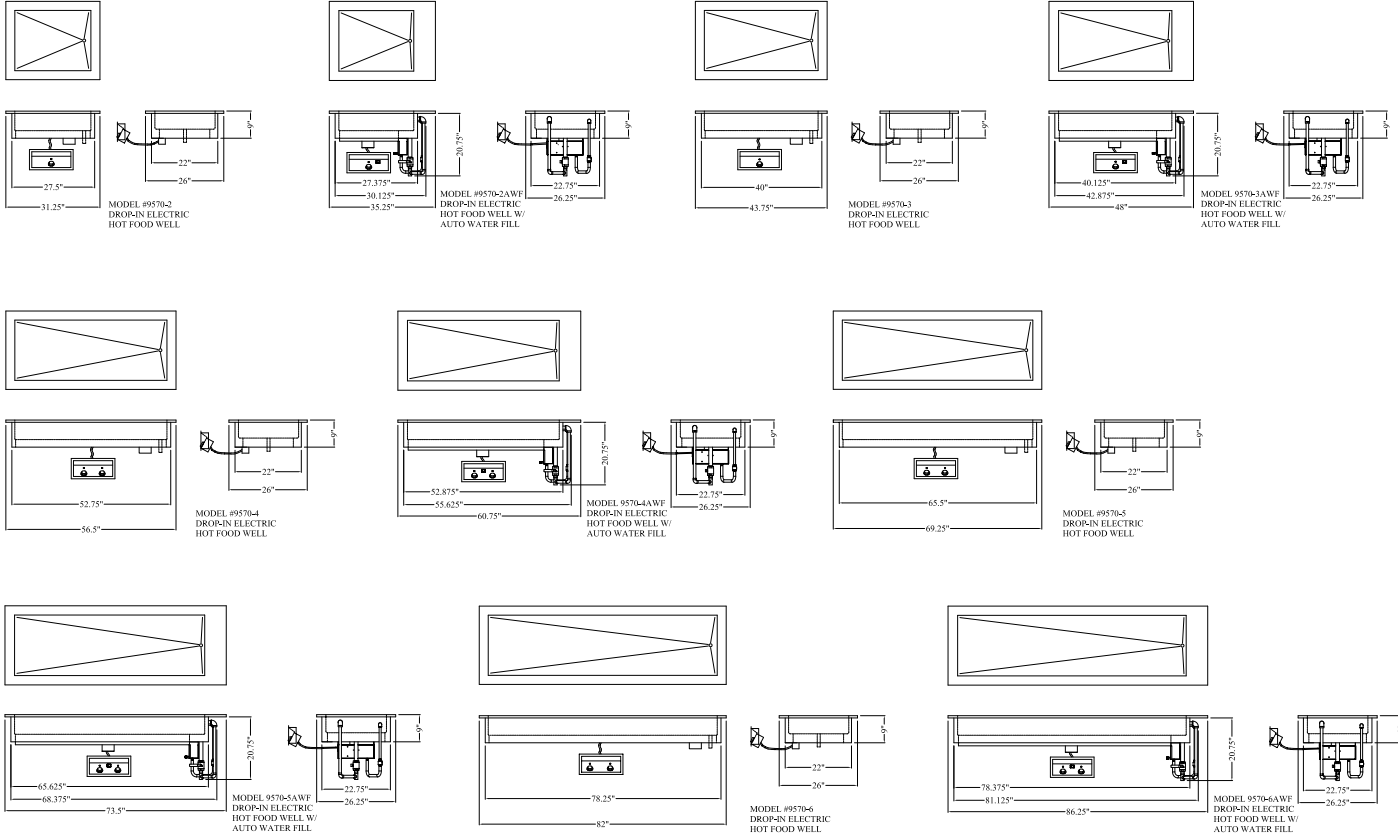

Model	Length	Depth	12"x20" Pan Cap.	Cut Out Size		No. of Elements	Watts	Amps/ 60/1 PH		Ship Wt.
				Unit	Control panel			208V	240V	
9570-2	31.25"	26"	2	27.75" x 22.25"	14.25" x 5.75"	1	3000	14.4	12.5	110
9570-3	43.75"	26"	3	40.25" x 22.25"	14.25" x 5.75"	1	3000	14.4	12.5	135
9570-4	56.5"	26"	4	53" x 22.25"	14.25" x 5.75"	2	6000	28.8	25	160
9570-5	69.25"	26"	5	65.75" x 22.25"	14.25" x 5.75"	2	6000	28.8	25	185
9570-6	82"	26"	6	78.5" x 22.25"	14.25" x 5.75"	2	6000	28.8	25	210
9570-2AWF	35.25"	26.25"	2	30.375" x 23"	14.25" x 5.75"	1	3000	14.4	12.5	120
9570-3AWF	48"	26.25"	3	43.125" x 23"	14.25" x 5.75"	1	3000	14.4	12.5	145
9570-4AWF	60.75"	26.25"	4	55.875" x 23"	14.25" x 5.75"	2	6000	28.8	25	170
9570-5AWF	73.5"	26.25"	5	68.625" x 23"	14.25" x 5.75"	2	6000	28.8	25	195
9570-6AWF	86.25"	26.25"	6	81.375" x 23"	14.25" x 5.75"	2	6000	28.8	25	220