



BRAISING PANS

TILTING SKILLET ELECTRIC MODELS BPM-E MARINE

Braising pan shall be a Groen MARINE electric heated manual tilting BPM Series model with 10" deep pan body with 3" radius corners, 5/8" thick stainless steel clad cooking surface mounted on open leg stand with four flanged feet for attachment to deck.

AVAILABLE MODELS:

MECHANICAL CONTROLS:

- BPM-30E MARINE (30 GALLON)
- BPM-40E MARINE (40 GALLON)

CLASSIC CONTROLS:

- BPM-40EC MARINE (40 GALLON)

CONSTRUCTION: The pan body shall be of type 304 stainless steel, solid one-piece welded heavy-duty construction, with 10" pan depth. All exposed surfaces shall be stainless steel, except for the cover lift mechanism (aluminum) and the underside of the clad plate which is protected by a 316 stainless steel cover. The cooking surface is a heavy 5/8" thick stainless steel clad plate fitted with flat bar electric heating elements, ensuring efficient heat transfer over the entire cooking surface. The heavy plate prevents warping or distortion. Braising pan shall come standard with mounting bracket for either right-side, left-side or right-rear faucet mounting. Graduated fill-level marks in both gallons and liters are standard. Four height-adjustable stainless steel flanges provided for secure deck mounting. All exposed fasteners are 304 stainless steel hex-head.

FINISH: Interior of braising pan shall be polished to a 100 emery grit finish on C/A models, 180 emery grit on C2T models. Exterior of braising pan shall have a #3 finish, ensuring maximum ease in cleaning and maintaining appearance.

SANITATION & NSF LISTING: Braising pan shall be designed and constructed to be NSF-listed, meeting all known health department and sanitation codes. True open leg tubular stand design and 3" radius pan interior make cleaning easier.

UL LISTING: Braising pan shall be UL listed.

MANUAL TILT: The braising pan shall have a smooth-action, quick-tilting body with manual crank and worm-and-gear tilt mechanism, which provides precise control during pouring of pan contents. Pan body shall tilt to vertical in 23 turns and past vertical to assist in cleaning.

CONTROLS: All controls to be located in a right-front mounted enclosure with hinged protective cover.

Mechanical -E Models include: Power ON-OFF switch, temperature control, temperature control knob with 175 to 400°F (79 to 204°C) range increments and HEAT(ing) indicator light. **Classic -C Models** include: Power ON-OFF switch with indicator light, temperature control knob with 175 to 400°F (79 to 204°C) range increments and HEAT(ing) indicator light, IPX6 water resistance rating.

PERFORMANCE/FEATURES: Braising pan shall be equipped with controls that allow operation at 7-degree angle to facilitate griddling. Braising pan shall be thermostatically-controlled for automatic shut-off when desired temperature is reached and temperature falls below desired setting. Braising pan to have high limit thermostat as safety feature.

INSTALLATION: One electrical connection required. All marine units are available in 240 Volt, single & three phase, 440 or 480 Volt, three-phase, 60Hz electrical service.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



BPM-30EC Marine Model shown

OPTIONS/ACCESSORIES:

- Single pantry water faucet
- Double pantry water faucet
- Single or double pantry faucet with spray hose assembly (48" or 60")
- 2" tangent drawoff (option: must be ordered with unit)
- Strainer for tangent drawoff valve
- Pouring lip strainer
- Steamer pan carrier
- Steamer pan inserts


ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)


ELECTRICAL REQUIREMENTS					
REQ'D VOLTAGE	BPM-30E		BPM-40E/C		Kw
	PHASE	AMPS	PHASE	AMPS	
240	1	48	1	64	15.3
	3	28	3	37	
440	3	13	3	9.6	12.9
	3	14	3	11.5	
480	3	14	3	11.5	15.3

TABLE OF DIMENSIONS					
MODEL	BPM-30E		BPM-40E/C		
DIMS.	INCH	MM	INCH	MM	
A	26.25	667	35.75	908	
B	32.00	813	41.50	1054	
C	38.50	984	48.00	1226	
D	8.75	222	13.50	343	
E	8.90	225	13.60	346	
F	17.10	435	21.90	556	

- NOTES:
1. DIMENSIONS IN BRACKETS [] ARE MM.
 2. FLANGED FEET SUPPLIED FRONT & REAR
 3. ELECTRICAL CONNECTION: 1.75" DIA. [44] HOLE
 4. OTHER VOLTAGES AND PHASES ARE AVAILABLE.
 5. FAUCET BRACKET MAY BE INSTALLED ON LEFT OR RIGHT SIDE.
 6. FAUCET MAY BE INSTALLED ON FAUCET BRACKET OR ON REAR AS SHOWN.
 7. FLANGED FEET W/ (2) .34 DIA. HOLES ON 2-1/2" BOLT CIRCLE
 8. STAINLESS STEEL TRUNNIONS AND ELECTRIC ELEMENT SHIELD.

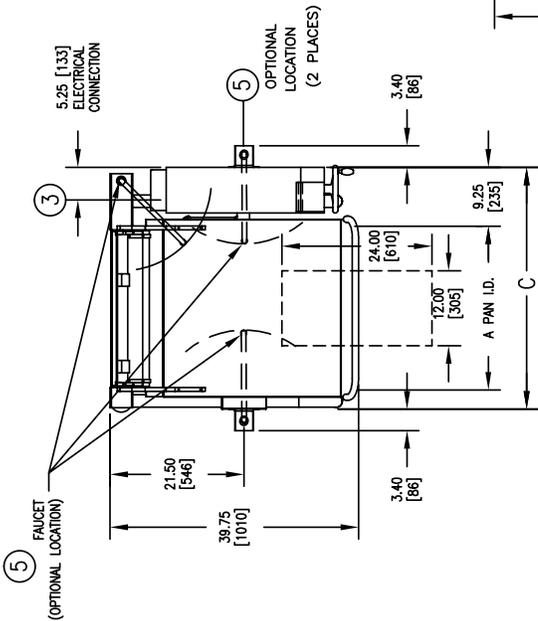


TOP VIEW

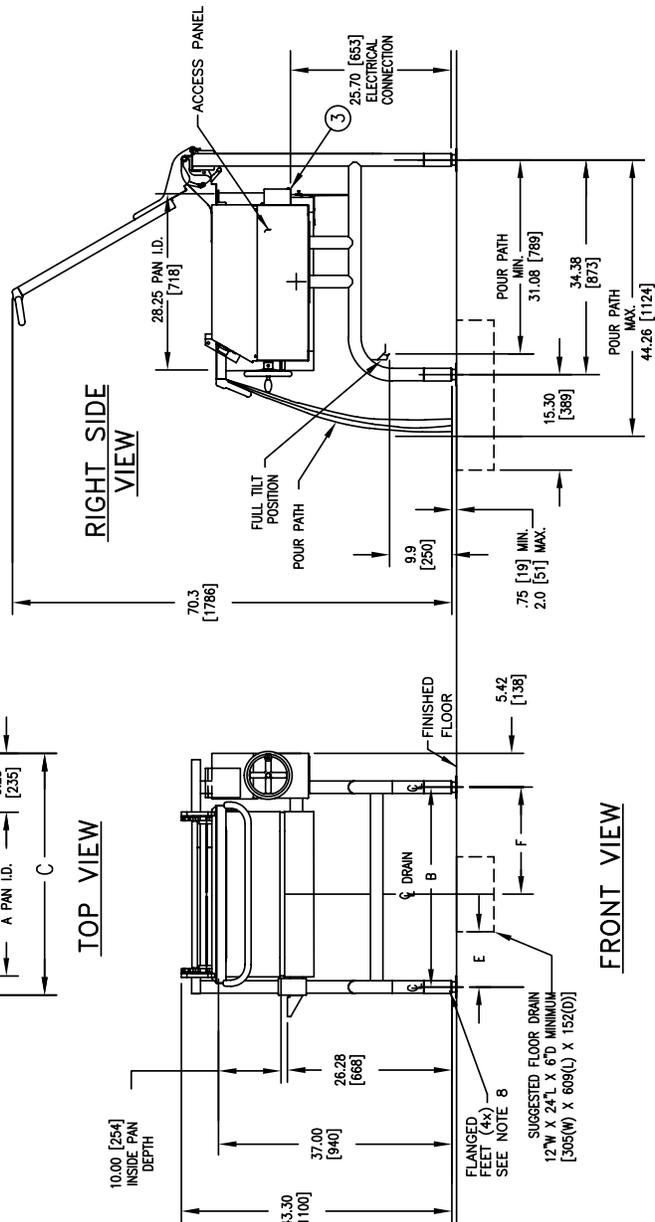

RIGHT SIDE VIEW

FRONT VIEW

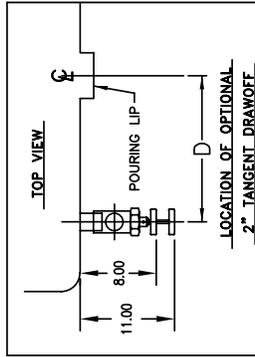

TOP VIEW



MECHANICAL CONTROL



CLASSIC CONTROL