



REFRIGERATORS & FREEZERS

CHEF BASE REMOTE REFRIGERATED MODELS 20000R

32 1/2" deep remote refrigerated cooking equipment stand with reinforced stainless steel top. 12 gauge steel subtop, and full marine edge. R-134a (standard) refrigeration system, with evaporator blower coil and expansion valve supplied & installed. Condensing unit not provided. Unit on 6" high adjustable legs. These units feature our Patented Drawer Cartridge Assembly. A fully welded, unitized drawer cartridge assembly with a quick release that allows the refrigerated drawers to be easily removed for cleaning. 3 year warranty on the entire drawer system.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



Model 20065R shown

AVAILABLE MODELS:

27" Drawer:

- 20042R
- 20065R
- 20092R

32" Drawer:

- 20042R-32
- 20065R-32
- 20092R-32

STANDARD FEATURES:

- R134A (standard, consult factory for other options) refrigeration system features expansion valve for fast recovery, and thermostatic control for operator adjustability
- Drawer Cartridge Assemblies are fully removable with Quick Release feature
- Foamed in place "CFC" free urethane insulation
- Marine edged stainless steel top with 12 gauge steel subtop to hold the heaviest cooking equipment
- Removable 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings
- Drawers to accommodate (2) 12"x 20"x 4"pans per drawer (pans not included)
- 6" high adjustable legs

REFRIGERATION SYSTEM: CFC free, R-134a (standard) refrigeration system to include Randell blower coil, and thermostatic control for operator adjustability. Blower coil fitted with expansion valve for fast recovery. Condensing unit not provided. Mullion coil, is coated to resist corrosion, and offers maximum air flow.

CABINET EXTERIOR: Cabinet body is constructed of all metal. The top, front, and louver panel are stainless steel. Full length, 12 gauge steel subtop beneath one piece stainless steel top with 1/2" marine edged. Body ends are stainless steel. 6" stainless steel legs with adjustable bullet feet are mounted to a heavy gauge steel frame assembly which is integrally welded to bottom of assembly. Unit totally prewired to junction box.

CABINET INTERIOR: Interior of cabinet is fully covered to meet N.S.F. standard #7. The interior is constructed of anodized aluminum with coved corners for easy clean-up. Drawer opening frames are A.B.S. and contain magnetic strip for positive seal of drawer gaskets. Unit insulated with CFC free, foamed in place polyurethane.

REFRIGERATED DRAWERS: Fully welded, unitized drawer cartridge assembly - patented. Heavy duty full extension 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings. Will accommodate (2) 12" x 20" x 4" deep pans per drawer (pans not included). Quick release allows drawers to be easily removed for cleaning. Stainless fronts, mounted to drawer cartridge assembly with easy to grasp drawer handles. Drawers with press fit magnetic gaskets - (designed for installation & removal without tools).

OPTIONS/ACCESSORIES:

- Flat top
- Electric condensate evaporator
- Dimension modification (consult factory)
- Mechanical housing on left
- Alternate refrigerant (consult factory)


ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)


LEGEND FØ
MODEL # 20042R
 AFF = ABOVE FIXED FLOOR
 JUNCTION ØØ 1/4" AFF
 115V/60Hz/1PH/6A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 CONDENSATE DRAIN 1/2"
 I.D. VINYL TUBING

LEGEND FOR
MODEL # 20065R
 AFF = ABOVE FIXED FLOOR
 JUNCTION ØØ 1/4" AFF
 115V/60Hz/1PH/3A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 CONDENSATE DRAIN 1/2"
 I.D. VINYL TUBING


LEGEND FØ
MODEL # 20092R
 AFF = ABOVE FIXED FLOOR
 JUNCTION ØØ 1/4" AFF
 115V/60Hz/1PH/4A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 CONDENSATE DRAIN 1/2"
 I.D. VINYL TUBING








(1) SET OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)



(2) SETS OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

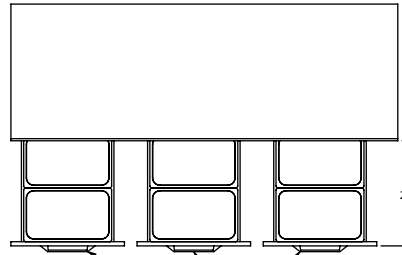

(3) SETS OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

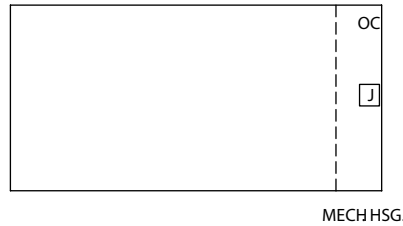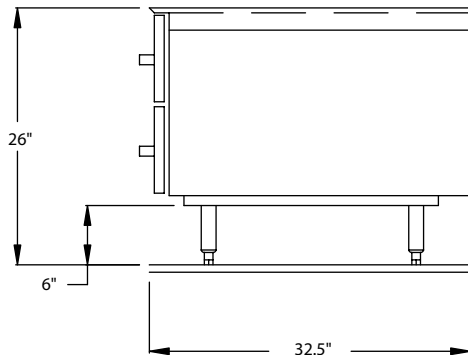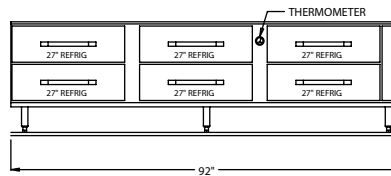


Model	L	D	H	Drawers	# of 12x20 pans	Volt	Amp	BTUS	Ship Wt.
20042R	42"	32 1/2"	26"	2	4	115/60/1	3	466	330
20065R	65"	32 1/2"	26"	4	8	115/60/1	3	823	460
20092R	92"	32 1/2"	26"	6	12	115/60/1	4	1252	600


LEGEND FOR MODEL # 20042R-32
 AFF = ABOVE FIXED FLOOR
 [J] JUNCTION ØØ 14" AFF 115V/60Hz/1Ph/3A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 [OC] CONDENSER DRAIN 1/2" I.D. VINYL TUBING

LEGEND FOR MODEL # 20065R-32
 AFF = ABOVE FIXED FLOOR
 [J] JUNCTION ØØ 14" AFF 115V/60Hz/1Ph/3A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 [OC] CONDENSER DRAIN 1/2" I.D. VINYL TUBING


LEGEND FOR MODEL # 20092R-32
 AFF = ABOVE FIXED FLOOR
 [J] JUNCTION ØØ 14" AFF 115V/60Hz/1Ph/4A
 CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.
 [OC] CONDENSER DRAIN 1/2" I.D. VINYL TUBING








(1) SET OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DPANS (PANS NOT PROVIDED)

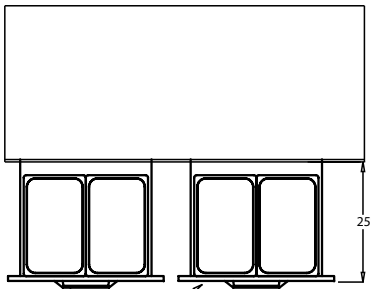

(2) SETS OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DPANS (PANS NOT PROVIDED)

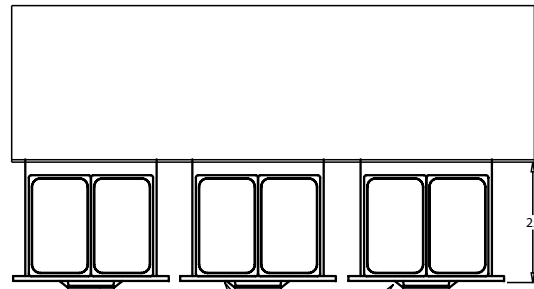

(3) SETS OF CARRIAGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DPANS (PANS NOT PROVIDED)

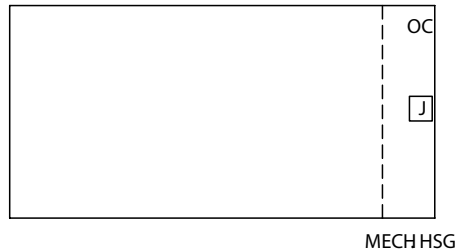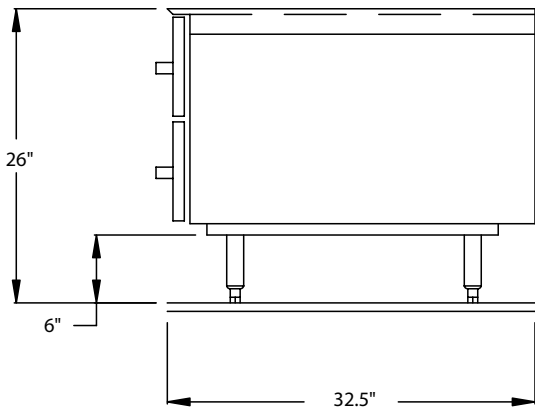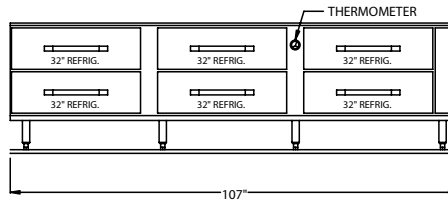

Model	L	D	H	Drawers	# of 12x20 pans	Volt	Amp	BTUs	Ship Wt.
20042R-32	47"	32 1/2"	26"	2	4	115/60/1	3	466	330
20065-32	75"	32 1/2"	26"	4	8	115/60/1	3	823	460
20092R-32	107"	32 1/2"	26"	6	12	115/60/1	4	1300	600