



SERVING STATIONS

SERVING LINE HOT WELL MODELS RANFG HTD

Fiberglass hot well serving station. 16 gauge stainless steel top with locking device designed to work with all other serving line equipment. One-piece fiberglass body, available with enclosed base, open storage or heated storage base. Provided with 4 swivel casters (2 locking). Individual thermostatically controlled 12" x 20" die-stamped hot wells with drains manifolded to common 1" drain and valve provided. Meets NSF Std. #4 for product holding.

SHORT FORM SPEC: Fiberglass hot well electric serving station. 16 gauge stainless steel top with locking device, one-piece fiberglass body provided with 4 swivel casters (2 locking). 1-piece top with individual thermostatically controlled die-stamped wells with drains manifolded to common 1" drain with valve.

AVAILABLE MODELS:

CLOSED BASE (NO STORAGE): HEATED BASE (STORAGE):

- | | |
|-------------|--------------|
| RANFG HTD-2 | RANFG HTD-3B |
| RANFG HTD-3 | RANFG HTD-4B |
| RANFG HTD-4 | RANFG HTD-5B |
| RANFG HTD-5 | RANFG HTD-6B |
| RANFG HTD-6 | |

OPEN BASE (STORAGE):

- RANFG HTD-3S
- RANFG HTD-4S
- RANFG HTD-5S
- RANFG HTD-6S

AVAILABLE FIBERGLASS COLORS:

PITCH BLACK
DARK BARK BROWN
CABERNET WINE
BRITISH RACING GREEN
TIN MAN GRAY
TRUE BLUE
LIGHT SKY BLUE
CANDY APPLE RED
TIGER LILLY ORANGE
CANARY YELLOW
WHITE

STANDARD FEATURES:

- Individual thermostatic controls for precise food temperatures
- Meets NSF Std. #4 for product holding
- All stainless steel top with die-stamped raised sanitary rim pan openings
- Drain and gate valve provided
- Swivel casters - (2) locking
- Concealed locking mechanism with easy to use spring activated catch
- One-piece fiberglass body
- 8' cordset

CABINET CONSTRUCTION: Body to be one-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers. Hinged louvered door provides access to drain valve. Removable control panel for easy access to heating elements. Unit to be equipped with 4 swivel casters, (2) locking. Open storage model (HTD-S) includes stainless steel undershelf constructed of 22 gauge stainless steel with integrally welded steel under-bracing. Heated base models (HTD-B) are NSF approved for food storage. Thermostatically controlled, electrically heated base with hinged door(s) and chrome shelf (1 per door).

TOP CONSTRUCTION: Top to be one piece of die-formed 16 gauge stainless steel with 1-1/2", 90° nosing on all sides. Unit fitted with complement of 12" x 20" top openings with raised die-stamped perimeters.

FOOD WELLS: Electrically heated food wells are independently controlled by thermostatic controls and include drains manifolded to common valve. Each well provided with on/off indicator light mounted into removable control panel allowing easy access to heating element boxes. 8' cordset provided for voltage specified.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



Model RANFG HTD-4 shown with RAN INV60 trayslide.



OPTIONS/ACCESSORIES:

- Canopy
- Overshelves
- Trayslides
- Corian top
- 14 gauge top
- Graphics
- Food Shields
- Elementary school height (not available on "B" series)
- Electrical Distribution System
- Hinged doors ("S" series only)
- Door lock
- Reduced wattage elements



ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)
- [KCL AutoCAD/Revit](#)





RANFG HTD-2





RANFG HTD-3/3S/3B







RANFG HTD-4/4S/4B

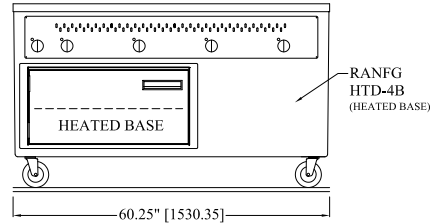
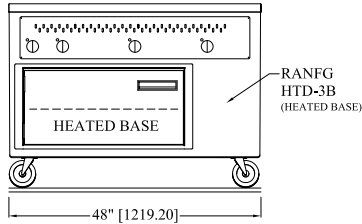




RANFG HTD-5/5S/5B

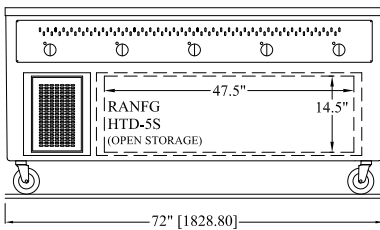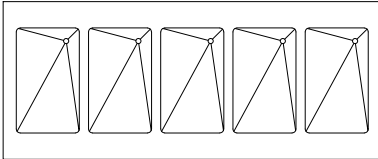

RANFG HTD-6/6S/6B

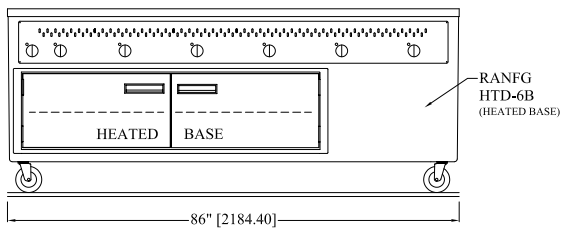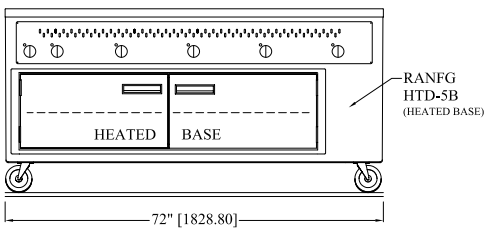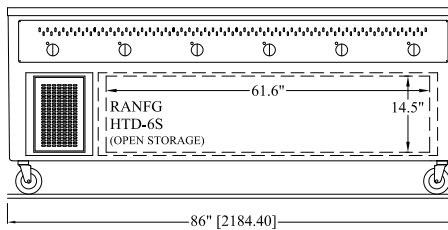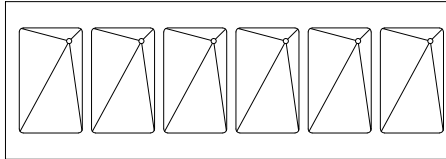



MODELS	L	D	H	No. of Wells	120V				208V				240V		Ship Wt.
					500W		1100W		865W		1100W		1100W		
					Amps*	NEMA	Amps*	NEMA	Amps*	NEMA	Amps*	NEMA	Amps*	NEMA	
CLOSED BASE/OPEN BASE															
RANFG HTD-2	30"	30"	35.5"	2	8.33	5-15P	18.33	5-30P	8.32	6-15P	10.58	6-15P	9.17	6-15P	175
RANFG HTD-3/S	48"	30"	35.5"	3	12.50	5-20P	27.5	5-50P	12.48	6-20P	15.87	6-20P	13.75	6-20P	215
RANFG HTD-4/S	60"	30"	35.5"	4	16.67	5-30P	36.67	5-50P	16.63	6-30P	21.15	6-30P	18.33	6-30P	260
RANFG HTD-5/S	72"	30"	35.5"	5	20.83	5-30P	N/A	N/A	20.79	6-30P	26.44	6-50P	22.92	6-30P	325
RANFG HTD-6/S	86"	30"	35.5"	6	25	5-50P	N/A	N/A	24.95	6-50P	31.73	6-50P	27.5	6-50P	390
HEATED STORAGE BASE															
RANFG HTD-3B	48"	30"	35.5"	3	20.83	5-30P	35.83	5-50P	N/A	N/A	20.03	6-30P	17.92	6-30P	230
RANFG HTD-4B	60"	30"	35.5"	4	25	5-50P	N/A	N/A	N/A	N/A	25.32	6-50P	22.5	6-30P	275
RANFG HTD-5B	72"	30"	35.5"	5	N/A	N/A	N/A	N/A	N/A	N/A	30.61	6-50P	27.09	6-50P	350
RANFG HTD-6B	86"	30"	35.5"	6	N/A	N/A	N/A	N/A	N/A	N/A	35.9	6-50P	31.67	6-50P	415

*Note: Amperage for base unit only. Any accessory heat lamp or display illumination loads must be added to the total amperage.