


INTRODUCING HCI-SWITCHABLE COMBINATION WELLS



- ✓ **Individual Well Control** provides ultimate flexibility, allowing wells to be set for holding product **Hot, Cold or Frozen** (any combination)
- ✓ **Intuitive Controls** are Easy To Use
The three-position switch allows modes to be changed quickly. Temperature set-points are maintained when switching between modes or turning wells off. Easy visuals: blue = cold, red=hot.
- ✓ Hot Mode Functions as **Wet or Dry Operation** (manifolded drains optional)



Multi-Position Pan Ledge for Convenience & Performance

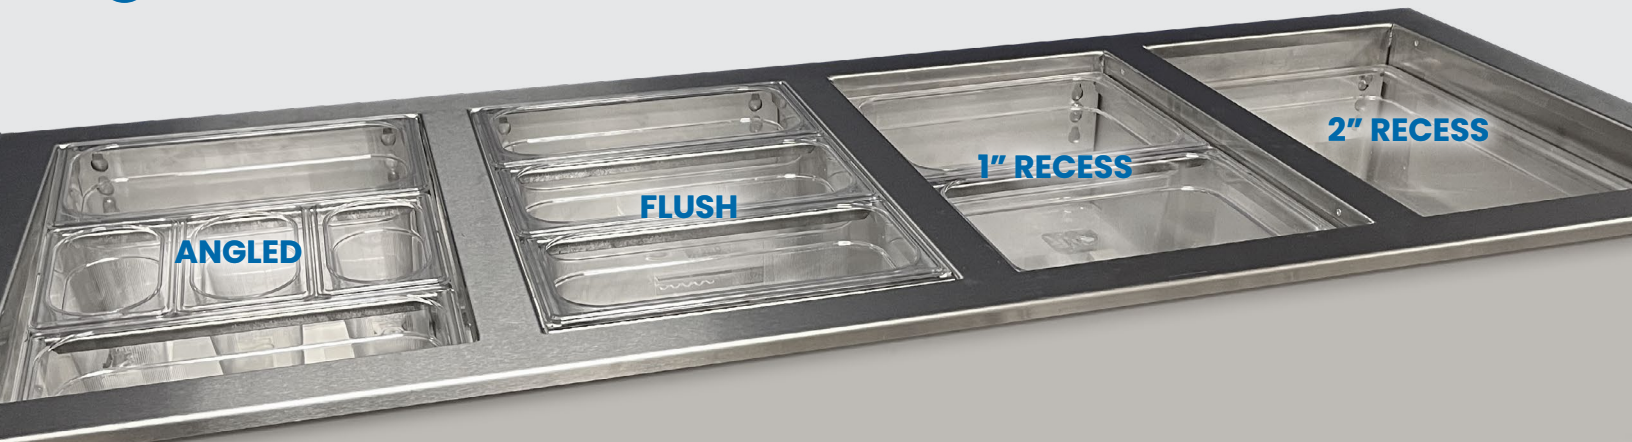

**Inter-Locking
Adapter Bars**
Provided as
Standard

Click or Scan to
view Spec Sheets



MODEL	LENGTH	WIDTH	PAN CAPACITY 12" X 20" X 6"	CUTOUT DIM FOR UNIT		CUTOUT DIM FOR CONTROL PANEL		NEMA PLUG			SHIP WT (LBS)
				L	W	L	W	120V/60/1PH	120/208V/60/1PH	120/240V/60/1PH	
HCI-1	18"	26"	1	16.69"	24.9"	6.25"	5.25"	5-15P	14-20P	14-20P	110
HCI-2	33"	26"	2	31.69"	24.9"	11.375"	5.25"	5-15P	14-20P	14-20P	135
HCI-3	48"	26"	3	46.69"	24.9"	16.5"	5.25"	5-20P	14-20P	14-20P	160
HCI-4	63"	26"	4	61.69"	24.9"	11.375" (x2)	5.25" (x2)	L5-30P	14-20P	14-20P	215