



# SERVING STATIONS

## SERVING LINE FOOD SHIELD MODELS RS AFS-DTDS

Designer series, adjustable food shield. Double tier-double sided. Front glass panel(s) are adjustable in 10 degree increments for flexibility and convertible for single or double sided operation.

**SHORT FORM SPEC:** Randell designer series Adjustable Food Shields. Double tier-double sided design is convertible to accommodate both single or double sided operation. Framework is constructed of 1" diameter stainless steel tubing with #4 satin finish. All glass panels shall be tempered with radius corners and polished edges. All glass panels are mounted to framework with fasteners through glass panels for secure mounting. Provided with 2" diameter round mounting flanges.

### AVAILABLE MODELS:

- RS AFS-DTDS-30
- RS AFS-DTDS-36
- RS AFS-DTDS-48
- RS AFS-DTDS-60
- RS AFS-DTDS-72
- RS AFS-DTDS-86

### FINISH:


- Stainless steel #4 finish

### GLASS:

- 1/4" Tempered Glass: End Panels
- 3/8" Tempered Glass: Front Panels, Top/Horizontal Panels up to 48"
- 1/2" Tempered Glass: Top/Horizontal Panels over 48" length
- Radius corners
- Polished Edges



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400




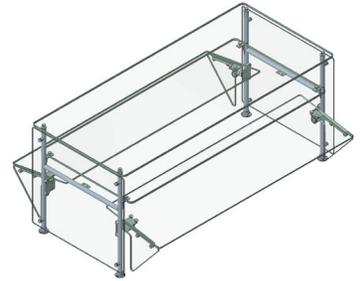


### OPTIONS/ACCESSORIES:

- LED lighting
- Heatlamp with LED lighting
- Dimension modification (Consult factory)

### ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)
- [KCL AutoCAD/Revit](#)

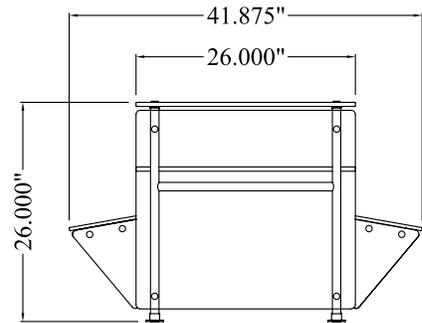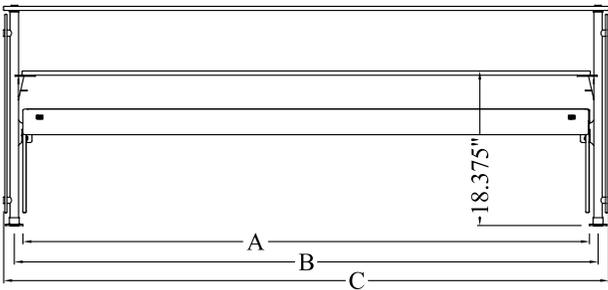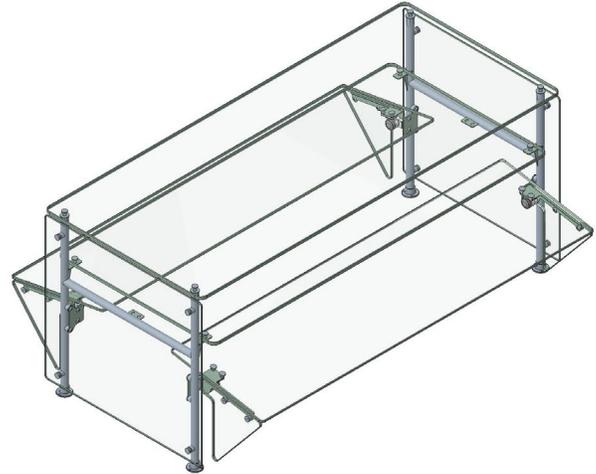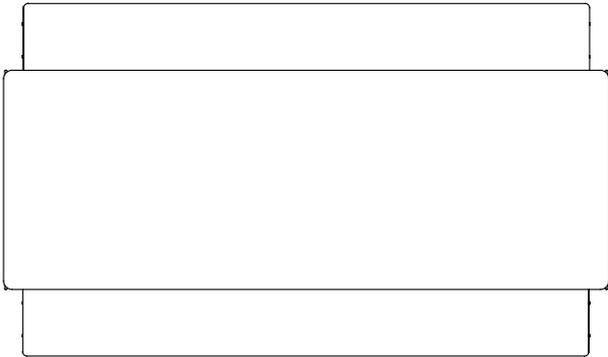

MODEL	DIMENSION: A (CLEAR BETWEEN FEET)	DIMENSION: B (POST-POST CENTER LINE)	DIMENSION: C (OVERALL LENGTH)	LED LIGHTING AMPS (120v)	HEATLAMP W/ LED LIGHTING AMPS (120v)	HEATLAMP W/ LED LIGHTING AMPS (208v)
RS AFS-DTDS-30	25.125	27.25	29.75	1	3	1.7
RS AFS-DTDS-36	31.125	33.25	35.75	1	3.9	2.2
RS AFS-DTDS-48	43.125	45.25	47.75	1	5.8	3.3
RS AFS-DTDS-60	55.125	57.25	59.75	1	7.9	4.6
RS AFS-DTDS-72	67.125	69.25	71.75	1	10	5.7
RS AFS-DTDS-86	81.125	83.25	85.75	1	9.8	5.8