



SERVING STATIONS

SERVING LINE FOOD SHIELD MODELS RS AFS-STDS

Designer series, adjustable food shield. Single tier-double sided. Front glass panel(s) are adjustable in 10 degree increments for flexibility and convertible for self-service of full-serve operation.

SHORT FORM SPEC: Randell designer series Adjustable Food Shields. Single tier-double sided design is convertible to accommodate both self-service or full-serve operation. Framework is constructed of 1" diameter stainless steel tubing with #4 satin finish. All glass panels shall be tempered with radius corners and polished edges. All glass panels are mounted to framework with fasteners through glass panels for secure mounting. Provided with 2" diameter round mounting flanges.

AVAILABLE MODELS:

- RS AFS-STDS-30
- RS AFS-STDS-36
- RS AFS-STDS-48
- RS AFS-STDS-60
- RS AFS-STDS-72
- RS AFS-STDS-86

FINISH:


- Stainless steel #4 finish

GLASS:

- 1/4" Tempered Glass: End Panels
- 3/8" Tempered Glass: Front Panels, Top/Horizontal Panels up to 48"
- 1/2" Tempered Glass: Top/Horizontal Panels over 48" length
- Radius corners
- Polished Edges



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400







OPTIONS/ACCESSORIES:

- LED lighting
- Heatlamp with LED lighting
- Dimension modification (Consult factory)

ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)
- [KCL AutoCAD/Revit](#)

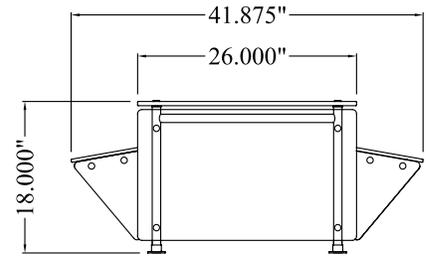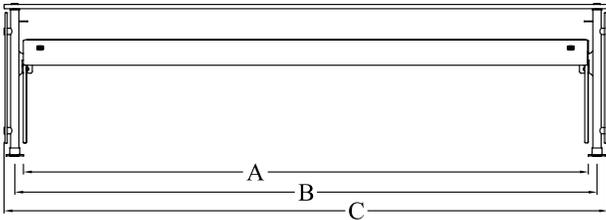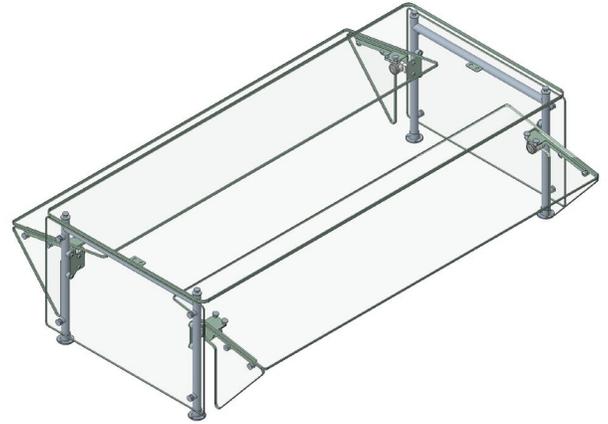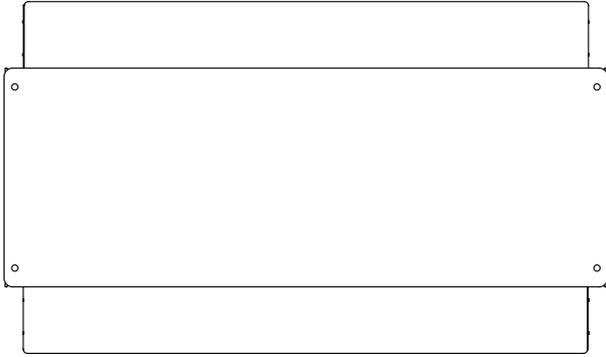

MODEL	DIMENSION: A (CLEAR BETWEEN FEET)	DIMENSION: B (POST-POST CENTER LINE)	DIMENSION: C (OVERALL LENGTH)	LED LIGHTING AMPS (120v)	HEATLAMP W/ LED LIGHTING AMPS (120v)	HEATLAMP W/ LED LIGHTING AMPS (208v)
RS AFS-STDS-30	25.125	27.25	29.75	1	3	1.7
RS AFS-STDS-36	31.125	33.25	35.75	1	3.9	2.2
RS AFS-STDS-48	43.125	45.25	47.75	1	5.8	3.3
RS AFS-STDS-60	55.125	57.25	59.75	1	7.9	4.6
RS AFS-STDS-72	67.125	69.25	71.75	1	10	5.7
RS AFS-STDS-86	81.125	83.25	85.75	1	9.8	5.8